


DIP 3*8 Sealing Crystals 3.0X8.0mm

Applications Features

- RTC

- Dimensions: 3.0 x 8.0mm.
 - Standard Frequency: 32.768KHz

- Resistance welded type crystal units.
 - Low impedance performance.

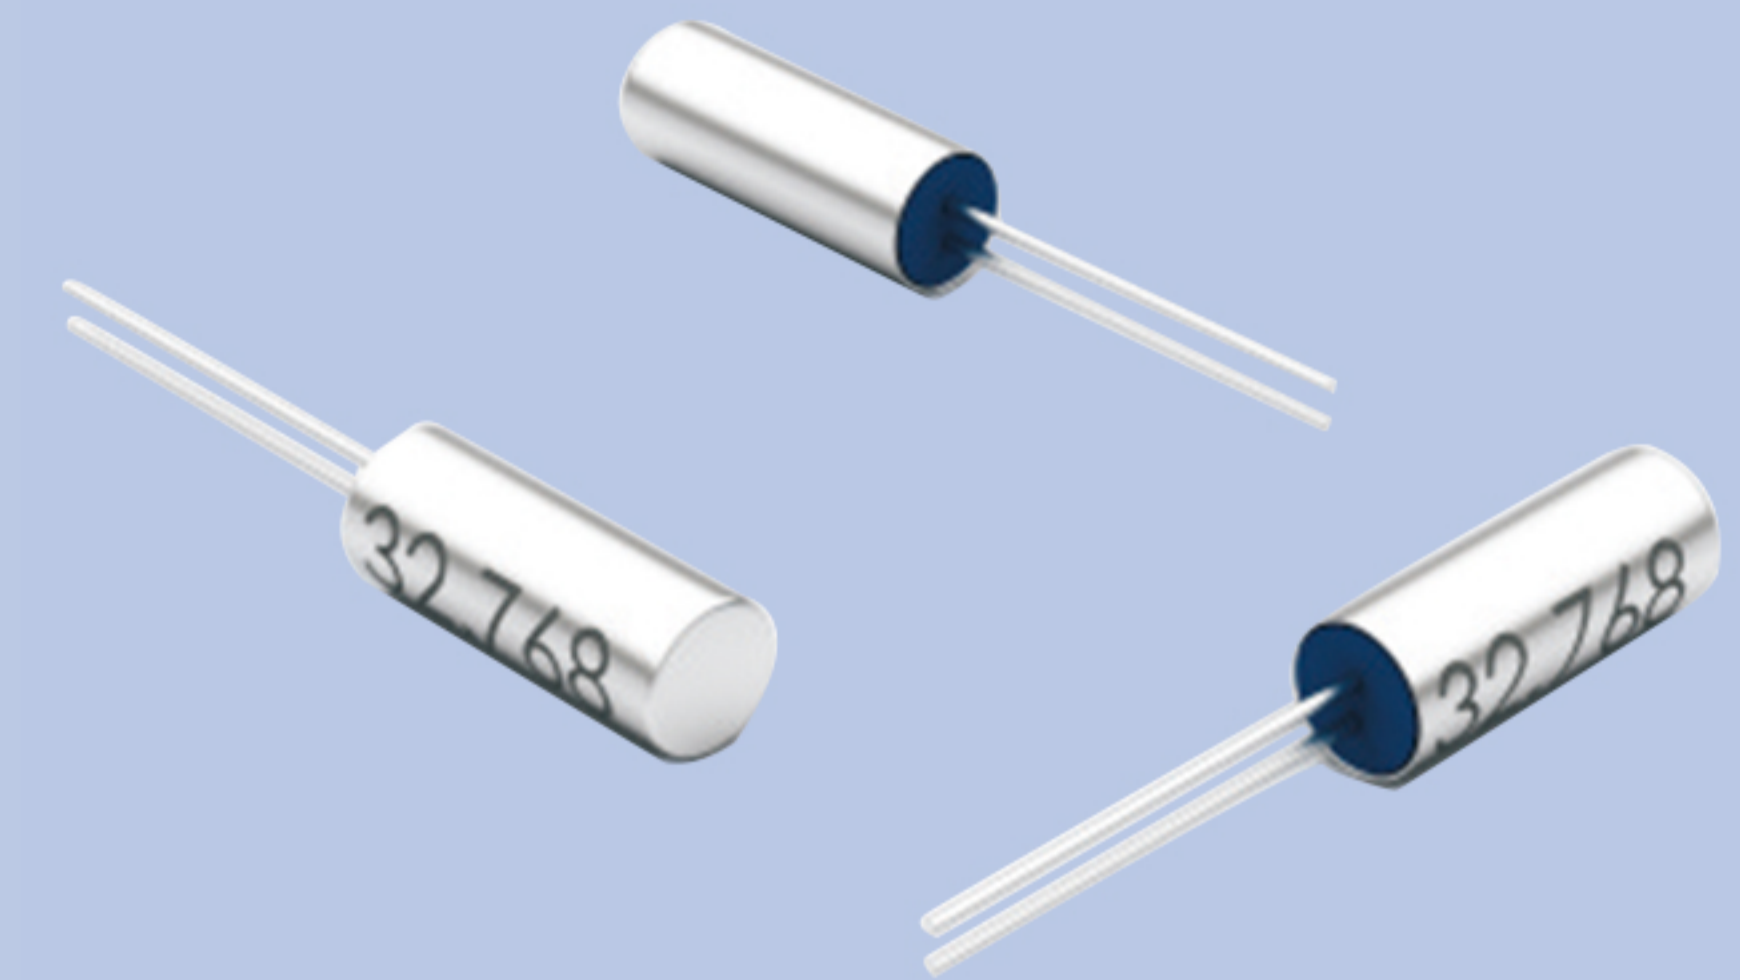

Electrical Specifications

Item	Symbol	Specifications
Nominal Frequency (额定频率范围)	f_nom	32.768KHz
Load Capacitance (负载电容)	CL	12.5pF, or specify
Frequency Tolerance (频率偏差) (at 25°C)	f_tol	±5ppm, ±10ppm, or specify
Parabolic Coefficient (频率温度系数)	B	$(-0.036 \pm 0.01) * 10^{-6} / ^\circ\text{C}^2$
Operating Temperature (工作温度)	T_use	-20~+70°C, 40~+85°C, or specify
Storage Temperature (储存温度)	T_stg	-55~+125°C
Shunt Capacitance (静态电容)	C0	2.0pF Max.
Motional Capacitance (动态电容)	C1	3.8fF
Level of Drive (激励电平)	DL	1.0μW Typ.
Aging (老化) (at 25°C)	f_age	±3ppm/year Max.

Equivalent Series Resistance(等效串联电阻ESR)

DIP 3*8
40KΩ Max.

Dimensions and Recommended land pattern(外观尺寸及推荐焊盘)

